


3路 0°功率分配/合成器 频率 1-1050MHz

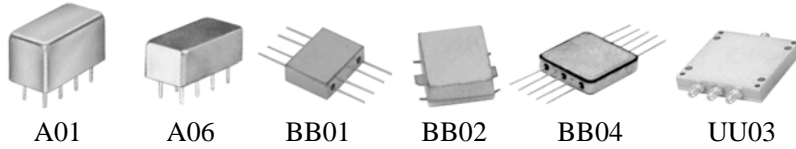

型号	频率范围 MHz f_L-f_H	隔离度 dBMin			插损 dB (+4.8dB)Max			相位不平衡度 (°)Max			幅度不平衡度 dBMax			外形 封装	引脚 连接
		L	M	H	L	M	H	L	M	H	L	M	H		
VRG-3-1	10-500	25	25	25	0.75	0.9	1.2	2	3	4	0.2	0.3	0.4	A01	a
VRG-3-2	1-200	30	30	25	1.0	0.7	1.0	1	2	4	0.15	0.2	0.3	A01	a
VRG-3-3	1-100	30	35	30	0.3	0.4	0.5	1	2	2	0.15	0.2	0.3	A01	a
VRG-3-4	10-1000	25	20	20	0.6	1.0	1.2	1	2	3	0.2	0.3	0.4	A01	a
VRG-3-7	1-30	30	35	30	0.3	0.4	0.5	1	2	2	0.15	0.2	0.3	A01	a
VRG-3-23	850-1300	20	20	20	1.5	1.5	1.5	2	2	3	0.5	0.5	0.6	A01	a
VRG-3-101	10-500	25	25	25	0.75	0.9	1.2	2	3	4	0.2	0.3	0.4	A06	a
VRG-3-102	1-200	30	30	25	1.0	0.7	1.0	1	2	4	0.15	0.2	0.3	A06	a
VRG-3-103	1-100	30	35	30	0.3	0.4	0.5	1	2	2	0.15	0.2	0.3	A06	a
VRG-3-104	10-1000	25	20	20	0.6	1.0	1.2	1	2	3	0.2	0.3	0.4	A06	a
VRG-3-107	1-30	30	35	30	0.3	0.4	0.5	1	2	2	0.15	0.2	0.3	A06	a
VRG-3-201	10-500	25	25	25	0.75	0.9	1.2	2	3	4	0.2	0.3	0.4	BB01	b
VRG-3-202	1-200	30	30	25	1.0	0.7	1.0	1	2	4	0.15	0.2	0.3	BB01	b
VRG-3-203	1-100	30	35	30	0.3	0.4	0.5	1	2	2	0.15	0.2	0.3	BB01	b
VRG-3-204	10-1000	25	20	20	0.6	1.0	1.2	1	2	3	0.2	0.3	0.4	BB01	b
VRG-3-207	1-30	30	35	30	0.3	0.4	0.5	1	2	2	0.15	0.2	0.3	BB01	b
VRG-3-301	10-500	25	25	25	0.75	0.9	1.2	2	3	4	0.2	0.3	0.4	BB02	d
VRG-3-302	1-200	30	30	25	1.0	0.7	1.0	1	2	4	0.15	0.2	0.3	BB02	d
VRG-3-303	1-100	30	35	30	0.3	0.4	0.5	1	2	2	0.15	0.2	0.3	BB02	d
VRG-3-304	10-1000	25	20	20	0.6	1.0	1.2	1	2	3	0.2	0.3	0.4	BB02	d
VRG-3-307	1-30	30	35	30	0.3	0.4	0.5	1	2	2	0.15	0.2	0.3	BB02	d
VRG-3-401	10-500	25	25	25	0.75	0.9	1.2	2	3	4	0.2	0.3	0.4	BB04	c
VRG-3-402	1-200	30	30	25	1.0	0.7	1.0	1	2	4	0.15	0.2	0.3	BB04	c
VRG-3-403	1-100	30	35	30	0.3	0.4	0.5	1	2	2	0.15	0.2	0.3	BB04	c
VRG-3-404	10-1000	25	20	20	0.6	1.0	1.2	1	2	3	0.2	0.3	0.4	BB04	c
VRG-3-407	1-30	30	35	30	0.3	0.4	0.5	1	2	2	0.15	0.2	0.3	BB04	c
VRG-3-1K3	10-500	25	25	25	0.75	0.9	1.2	2	3	4	0.2	0.3	0.4	UU03	s
VRG-3-2K3	1-200	30	30	25	1.0	0.7	1.0	1	2	4	0.15	0.2	0.3	UU03	s
VRG-3-7K3	1-30	30	35	30	0.3	0.4	0.5	1	2	2	0.15	0.2	0.3	UU03	s

L 低段(f_L-10f_L) M 中段($10f_L-f_H/2$) H 高段($f_H/2-f_H$)

注：UU 外形的产品一般为 SMA 接头，外形封装为 UU03；当用 N 型接口时，外形封装为 UU03B，其型号在序列号后加 N 表示，如 VRG-3-1K3 产品其接口为 N 型时的型号分别为 VRG-3-1NK3。

引脚连接

接口	a	b	c	d	s
合端 S	6	4	3	1	S
1 分配端	1	1	6	2	1
2 分配端	2	5	8	3	2
3 分配端	5	8	10	4	3
接地	3,4,7,8	2,3,6,7	1,2,4,5,7,9	-	-
壳地	3,4,7,8	2,3,6,7	1,2,4,5,7,9	-	-
不用	-	-	-	-	-